


Phoenix

// Línea Protech

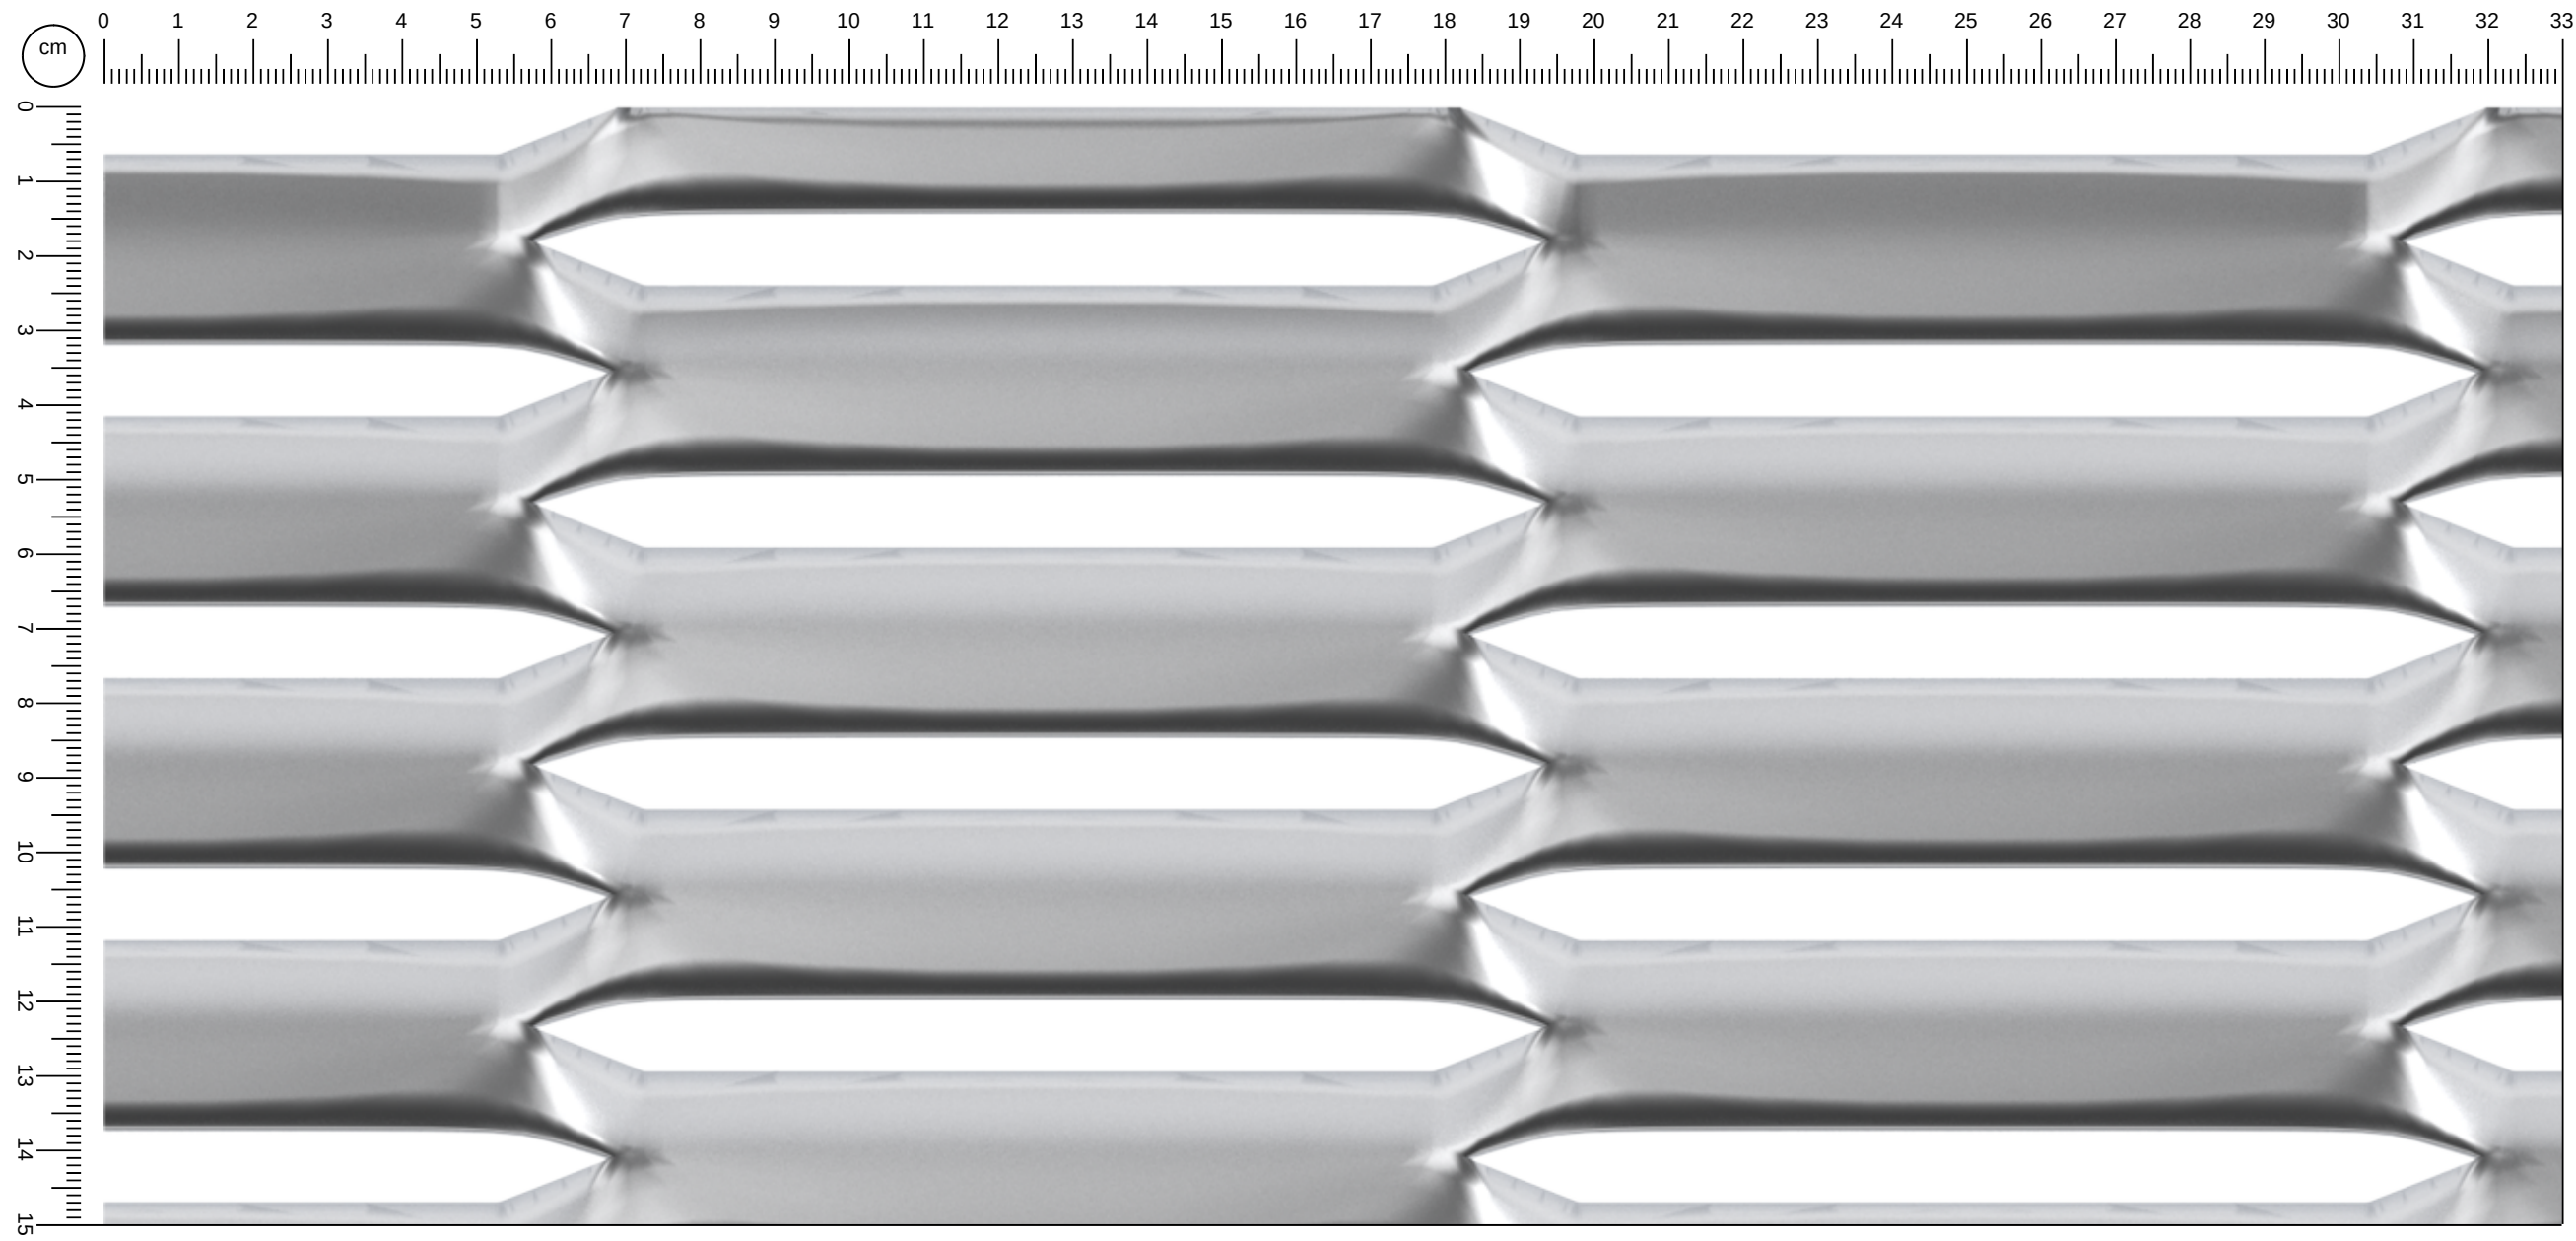


Materiale	Nombre	Peso kg/m2	SpFin mm	V/L %	1000x2000	1250x2500	1500x3000
Acero al carbono	E 250 x 35 (35) - 15 x 1,5	10,1	18,0 (~)	25 (~)	✔		
Acero al carbono	E 250 x 35 (35) - 15 x 2	13,5	18,0 (~)	25 (~)	✔		
Acero al carbono	E 250 x 35 (35) - 15 x 3	20,2	18,0 (~)	25 (~)	✔		
Aluminio	E 250 x 35 (35) - 15 x 1,5	3,5	18,0 (~)	25 (~)	✔		
Aluminio	E 250 x 35 (35) - 15 x 2	4,7	18,0 (~)	25 (~)	✔		
Aluminio	E 250 x 35 (35) - 15 x 3	7,0	18,0 (~)	25 (~)	✔	✔	✔


Riferimenti

Nome	=	Geom DL x DCn (DCr) - av x sp
Geom	=	Esagonale, Romboidale, Quadra, Tonda, Spianata
DL	=	Diagonale Lunga
DCn	=	Diagonale Corta nominale (riferimento interno)
DCr	=	Diagonale Corta reale
av	=	Avanzamento
sp	=	Spessore
spFin	=	Spessore finale
v/p %	=	% vuoto su pieno
Larg - DL	=	Larghezza in direzione DL
Lung - DC	=	Lunghezza in direzione DC (direzione di stiratura)

Dimensioni



Dimensione maglia



Facciata a vista

